EXO-Store

Shutter outputs interface

RELAIS 16A !!!

Main specifications :

Dimension : 90x157x70 mm
Weight : 0,323 kg
Power consumption : open relays : 14 mA
closed relays : 260 mA

Presentation

The EXO-Store has 8 outputs in order to control 4 shutters. Each shutter has 1 up and 1 down connection.

D2000(i) connection

The main unit D2000(i) is connected with the EXO-Store through a 4-wires bus called "RS-485 bus", amply used in the industrial and service industry world because of its robustness and reliability. The distance between D2000(i) and its interfaces can be around 1 kilometer.

D2000(i) accepts 16 EXO-Store, which means at most 64 shutters.

Working way

The EXO-Store has two kinds of contacts : phase and neutral, this one is common for 2x4 outputs.

Warning, the shutters must be connected as following :

1er relay : Up shutter 1.
2ème relay : Down shutter 1.
3ème relay : Up shutter 2.
4ème relay : Down shutter 2.
5ème relay : Up shutter 3.
6ème relay : Down shutter 3.
7ème relay : Up shutter 4.
8ème relay : Down shutter 4.

 © AnB s.a. 2009

EXO-Store : technical description

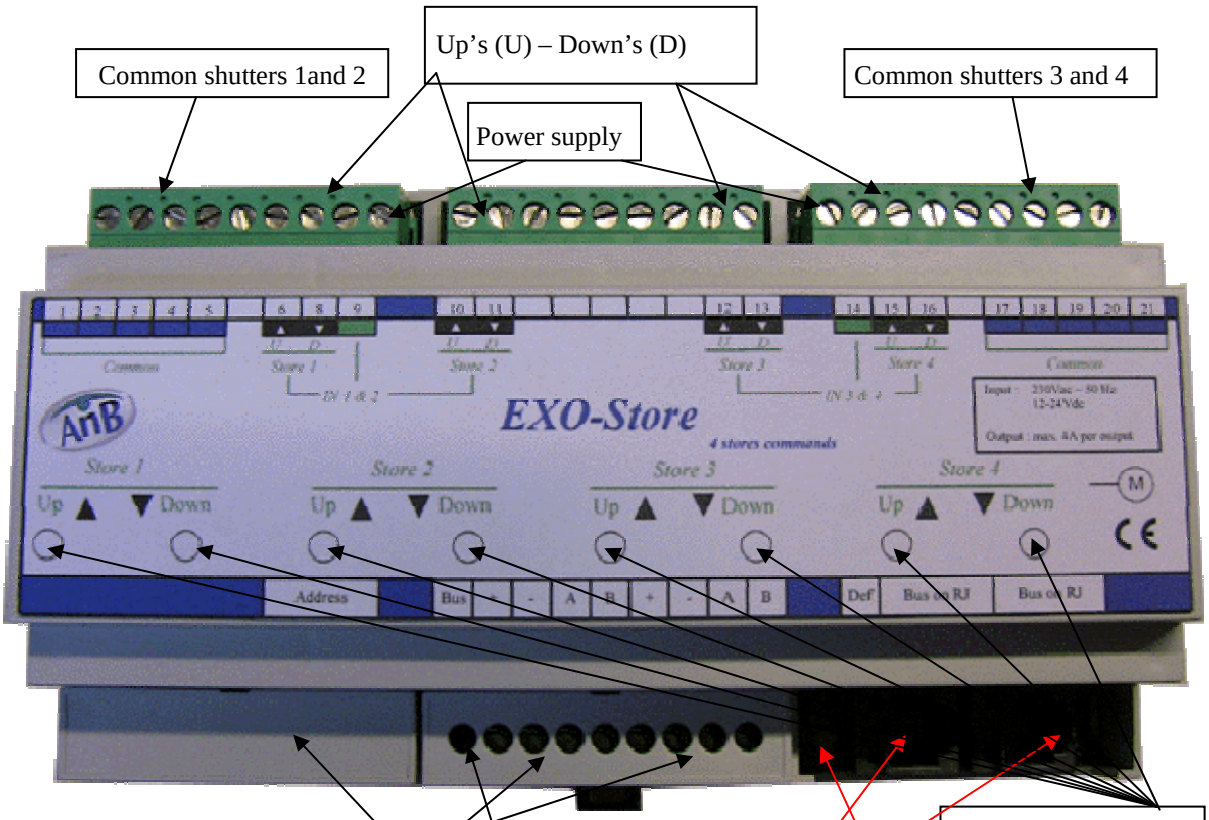
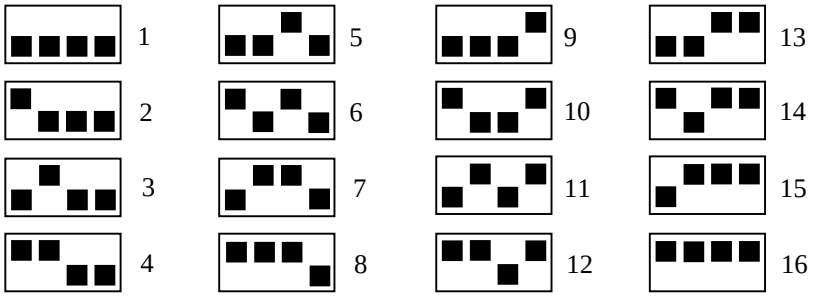
Adressing dip-switches positions